


Stainless Steel Submersible Pump

Technical Data

- 2 pole motor, class F insulation, IP68
- 1~230V \pm 50Hz
- Output power : 0.75kw
- Build-in thermal protector for single phase motor.
- Outlet : DN 2 1/2"

Application

- Water supply
- Drainage Water
- Garden water
- Sea water
- Sewage Water

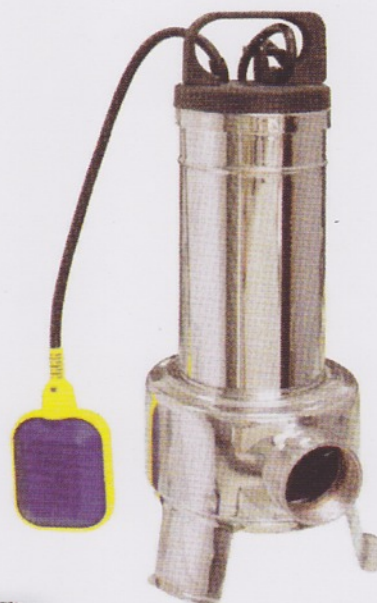

Performance Range

Capacity :	Q	up to 21m ³ /hr up to 77 igpm
Head :	H	up to 9m up to 30 feet
Temperature : T		up to 40 °C up to 80 °F
Speed :	n	2900rpm



Materials

- Stainless steel pump body
- Mechanical seal (Ceramic vs SIC)
- Stainless steel shaft
- Stainless steel impeller
- Standard with float switch

