

Spa, Bathtub & Swimming Pool Pumps**Applications**

- Jetted bath tubs
- Spa pools
- Swimming pools
- Massage stations
- Cleaning system

Motor


Induction motor 2-pole
Voltage: 220-240V/50hz, Single phase
Single phase with thermal protector from USA
Insulation class: F
Protection: IP55
Suitable for Continuous duty
High efficiency motor on request

Features


Quick joint could be used with the suction and discharge
With 0.8L & 0.8filter
Casing, pump cover, and impeller are made of high reinforced plastic
Shaft sealing: mechanical seal
Installation: Fitting for easy mouting and installation time
Bearing: NSK



Performance Curves

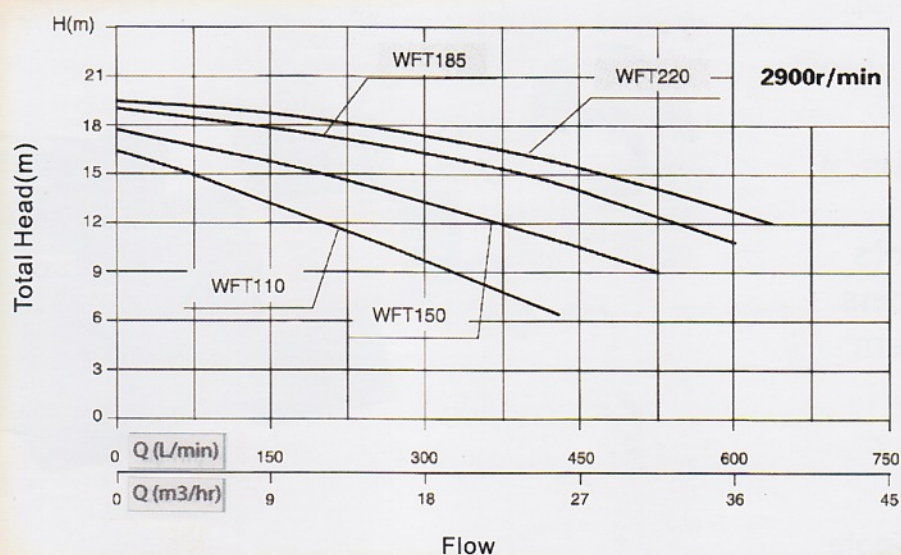

Installation Structure

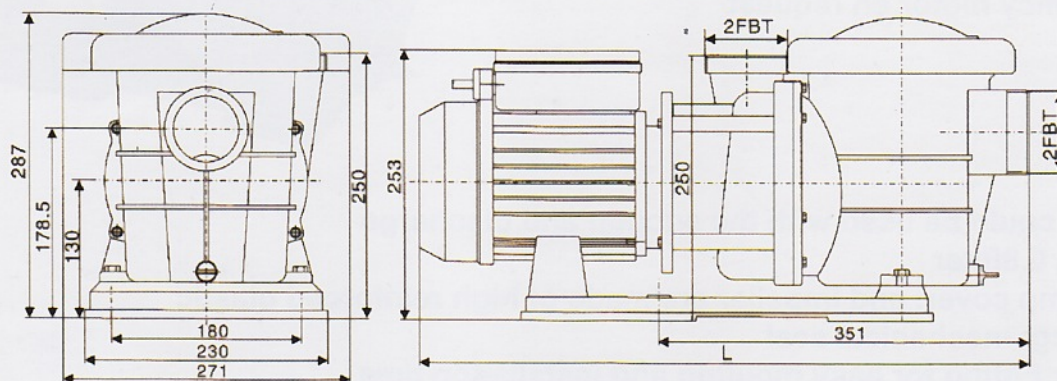

Model	Q _{max} (L/min)	H _{max} (m)	P ₁		L	(Kg)	Packing size (mm)	Qty/20'
			kW	HP				
WFT110	430	16.5	1.1	1.5	573	13.5	600x295x345	460
WFT150	520	18	1.5	2.0	573	14	600x295x345	460
WFT185	600	19	1.85	2.5	573	15	600x295x345	460
WFT220	635	19.5	2.2	3.0	598	17	600x295x345	440

220V/60Hz, 110V/60Hz models are available on request