


# AP Series

SEALED METALLIC PUMPS

AP 4 & 5 Series  
Centrifugal Pumps  
Horizontal (AC), Vertical (AV),  
and Vertical Cantilevered (AK)  
1/3 to 3 HP  
.14 to 1.33 kW



AC5



AV5

## Features


- Horizontal, vertical and vertical cantilevered
- Close coupled or pedestal mounted
- Corrosion resistant 316 stainless steel
- Standard NEMA 56C frame motors or IEC 71/B14, 80/B14 & 90/B14
- NPT & BSP threads
- Compact design with secure V-clamp (304 stainless steel construction)
- Standard, recessed, or high head impellers
- Bellows Type 21 seals with Viton, EPDM, or PTFE elastomers
- Viton, EPDM, or carbon lower bushings for vertical pumps
- Maximum temperature 300°F (149°C)

## Typical Applications


- Chemical processing, plating, photo processing, cleaning, printed circuit boards, pharmaceutical, waste water treatment, and cooling towers

## Performance

60 Hz 3450/1725 rpm

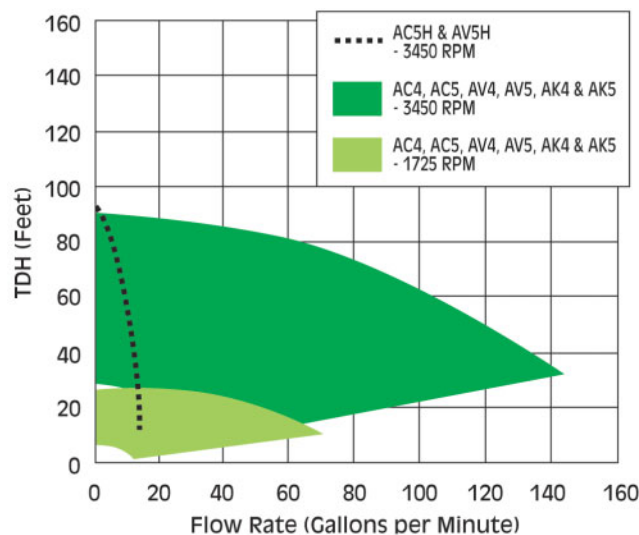

50 Hz 2900/1450 rpm

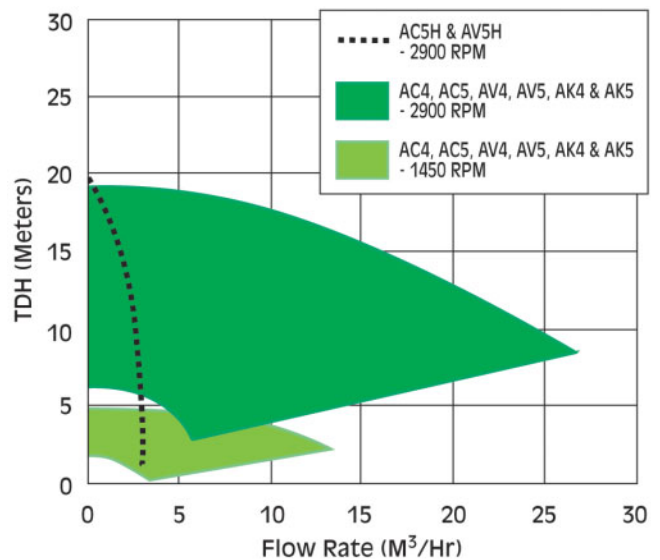


## Specifications

MODEL AC - Horizontal AV - Vertical AK - Vertical Cantilevered	Suction x Discharge	IMPELLER SIZE		MAX. FLOW		MAX. HEAD		MOTOR DRIVE	
	FNPT or FBSP	inch	cm	3450 rpm gpm	2900 rpm m <sup>3</sup> /hr	3450 rpm ft	2900 rpm m	3450 rpm hp	2900 rpm kW
AC4/AV4/AK4	3/4 x 1/2	3 3-1/4 3-1/2	7.6 8.2 8.8	33-39	5.9-7.0	44-60	8.4-11.7	1/2-1	.18-.37
AC5/AV5/AK5	1-1/4 x 3/4 1-1/2 X 1-1/4 2 X 1-1/2	4 4-1/4 4-1/2 4-3/4	10.1 10.8 11.4 12	70-145	12-26.3	35-89	6.1-18.5	3/4-3	.37-1.1
AC5H/AV5H	1/2 X 1/4	4-3/4	12	17	3.1	96	19	1/2-3/4	.18-.25
	FNPT or FBSP	inch	cm	1725 rpm gpm	1450 rpm m <sup>3</sup> /hr	1725 rpm ft	1450 rpm m	1725 rpm hp	1450 rpm kW
AC4/AV4/AK4	3/4 x 1/2	3 3-1/4 3-1/2	7.6 8.2 8.9	16-18.5	2.8-3.3	9.5-13.2	2-2.8	1/4	.18
AC5/AV5/AK5	1-1/4 x 3/4 1-1/2 X 1-1/4 2 X 1-1/2	4 4-1/4 4-1/2 4-3/4	10.1 10.8 11.4 12	38-72	6.8-13.1	7-21	.6-4.4	1/4-1/2	.18


\*AV5 only available with 1-1/2 x 1-1/4 port size.

## Dimensions

AC4 & AC5

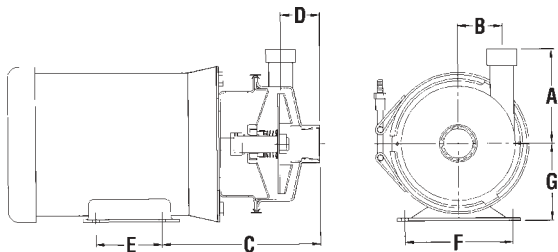

AV4 & AV5, AK4 & AK5

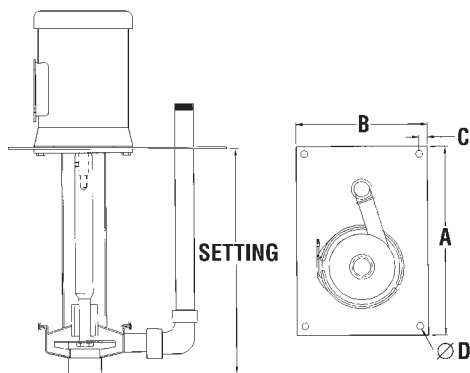

MOTOR FRAME	SUCTION x DISCHARGE	A	B	C*	D	E	F	G
56C (in)	2 x 1-1/2	5-1/4	1-3/8	7-1/2	2	3	4-7/8	3-1/2
	1-1/2 x 1-1/4	5-1/4	1-3/8	7-3/8	1-7/8	3	4-7/8	3-1/2
	1-1/4 x 3/4	4-1/4	1-7/8	7-1/4	1-3/4	3	4-7/8	3-1/2
	3/4 x 1/2	4	1-5/8	6-3/4	1-1/2	3	4-7/8	3-1/2
	1/2 x 1/4	4	2-1/4	6-5/8	1-3/4	3	4-7/8	3-1/2
80/90 (cm)	2 x 1-1/2	13.3	3.4	20	5	10	12.5/14	8/9
	1-1/2 x 1-1/4	13.3	3.4	20	4.7	10	12.5/14	8/9
	1-1/4 x 3/4	10.7	4.7	19	4.4	10	12.5/14	8/9
71 (cm)	3/4 x 1/2	10.1	4.1	18	3.8	9	11.2	7.1
	1/2 x 1/4	10.1	5.7	17	4.4	9	11.2	7.1

\*Approximate dimensions on the 80/90 and 71 frames. Confirm with factory before ordering.

MOTOR FRAME	SUCTION	DISCHARGE	SETTING	A	B	C	D
56J (in)	1-1/2	1-1/4	12/24/36	15	10	3/4	7/16
	3/4	1/2	12/24/36	15	10	3/4	7/16
	1/2	1/4	12/24/36	15	10	3/4	7/16