


MSVKC Series

MULTI-STAGE VERTICAL SEALLESS PUMPS

MSVKC and MSVKCW VERTIMAG™ Pumps 1 1/2 to 3 HP (.55 to 1.5 kW)



MSVKCW
(welded column type)
Polypropylene

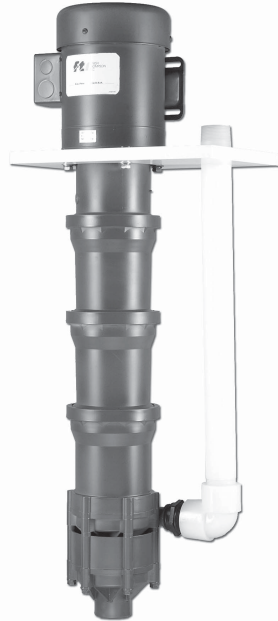

MSVKC
Polypropylene

Pat. No. 5,708,313

Features


- Sealless mag drive technology - eliminates microbubbles
- Multi-Stage design: Generates increased head at low flow rates, low power consumption, wide hydraulic envelope allows for mix and match impeller sizes
- Two vertical configurations available: standard design for deep sumps and close coupled/welded-column design to keep vapors in tank
- Unique interconnecting drive shaft - transmits torque from magnetic coupling to first stage impeller
- Independent thrust bearings at each stage for maximum reliability
- Polypropylene or PVDF construction
- Titanium, Hastelloy C or PVDF housing bolts
- Custom mounting plates available
- Accepts standard NEMA 56 or IEC 63, 71 and 80 with B14 frame motors
- Hydrotested to 120 psi - maximum working pressure 90 psi
- Maximum temperatures: 140°F (60°C)
- Maximum flow 60 gpm (13.6 m³/hr.), maximum head 100 ft. (20 m)

MultiStage is also available in a horizontal design


Performance

Note: numbers 1, 2, 3, 4, 5 on curves indicate impeller diameter combinations. See specifications

60 Hz 3450 rpm

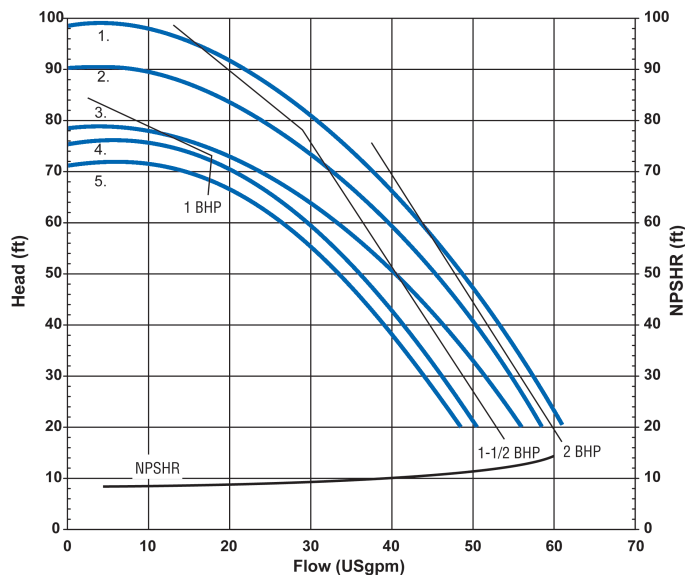

50 Hz 2900 rpm

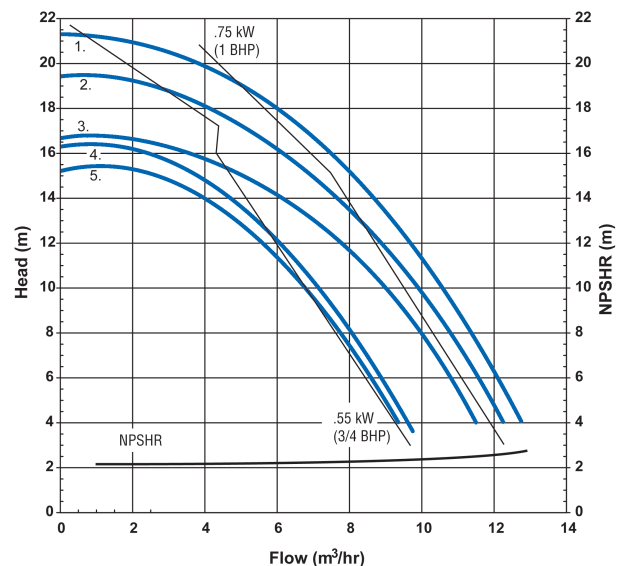

FINISH THOMPSON INC.

Specifications

MODEL* (CONSTRUCTION)	SUCTION	IMPELLER SIZE		MAX. FLOW		MAX. HEAD		MOTOR DRIVE		MAX. S.G. @ 50 cps
	DISCHARGE	inch	cm	3450 rpm gpm	2900 rpm m ³ /hr	3450 rpm ft	2900 rpm m	3450 rpm hp	2900 rpm kw	
MSVKC1 (P, V)	1-1/2" FNPT/BSP	3.88+3.88	9.86+9.86	61	12.7	99	21.3	3	1.1	1.5
MSVKC2 (P, V)		3.50+3.88	8.89+9.86	59	12.2	90	19.4	2	1.1	1.5
MSVKC3 (P, V)		3.50+3.50	8.89+8.89	56	11.5	79	16.7	2	.75	1.5
MSVKC4 (P, V)	1" MNPT/BSP	3.19+3.50	8.10+8.89	51	9.7	75	16.2	1.5	.75	1.8
MSVKC5 (P,V)		3.00+3.50	7.62+8.89	49	9.3	71	15.2	1.5	.55	1.8

* MSVKCW (welded column) also available. Contact FTI sales.

P - Polypropylene glass filled, carbon, PTFE, high purity ceramic and viton.

V - PVDF carbon filled, carbon, PTFE, high purity ceramic and viton.

Note: Actual performance may vary. Pump models and performance vary with conditions.

Dimensions



MODEL	MOTOR FRAME	A*		B*	
		inch	cm	inch	cm
MSVKC	56C	6-1/2	16.5	9	22.86
	71 IEC	4-1/8	10.5	8	20.3
	80 IEC	4-23/32	12	9	22.9

*Varies with motor manufacturer

Available Lengths



	C18	C24	C30	C36	C42
inch	16-5/8	22-11/16	28-3/4	34-13/16	40-7/8
cm	42.3	57.6	73	88.4	103.8

	C48	C54	C60	C66
inch	46-15/16	53	59-1/16	65-1/8
cm	119.2	134.6	150	165.4

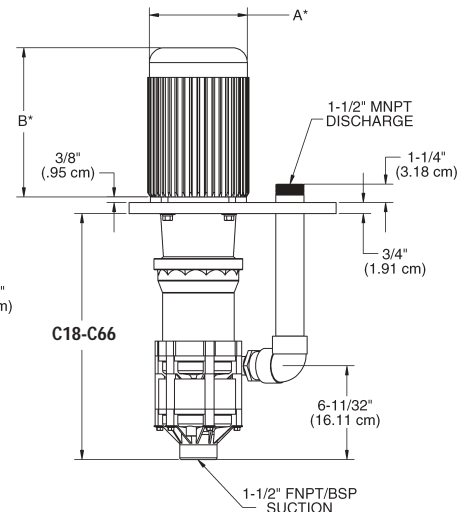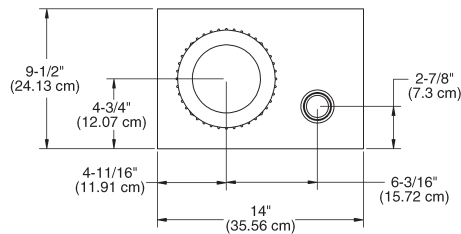

MODEL	MOTOR FRAME	A*		B*	
		inch	cm	inch	cm
MSVKCW	56J	6-1/2	16.5	8	20.3
	71 IEC	4-1/8	10.5	8	20.3
	80 IEC	4-23/32	12	9	22.9

*Varies with motor manufacturer

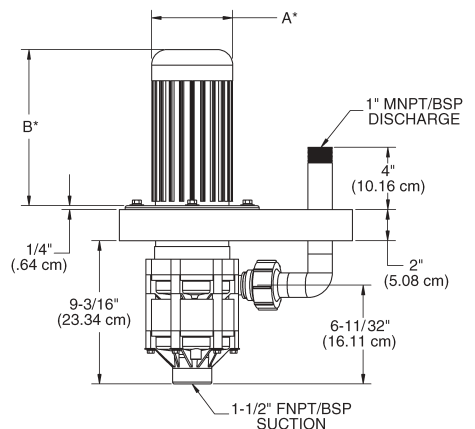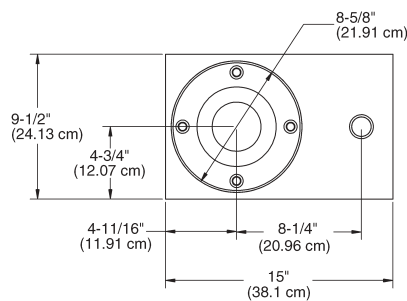

FINISH THOMPSON INC.

921 Greengarden Road • Erie, PA 16501-1591 U.S.A.

Ph 814-455-4478 • Fax 814-455-8518

Email fti@finishthompson.com • www.finishthompson.com

Toll Free USA & Canada 1-800-934-9384
Literature I.D. No. - FT01-845B, 9/03

